

## Industrial Hivision - Registration and Hardware changes

John M - 2024-06-12 - Industrial HiVision


This guide is designed to step through the registration process for the FULL license key, the AMP license key, and for changing the hardware key. Before using this guide HiVision should be installed. If upgrading to a new version using an AMP license, both the AMP and FULL versions must be installed into the new version.

### Full/Upgrade/AMP Registration

1. Go to [www.hivision.de/license/](http://www.hivision.de/license/)
2. Login or create a new login account for the Industrial HiVision license site.


3.

Register for an account and sign in simply or sign in if you have an existing account

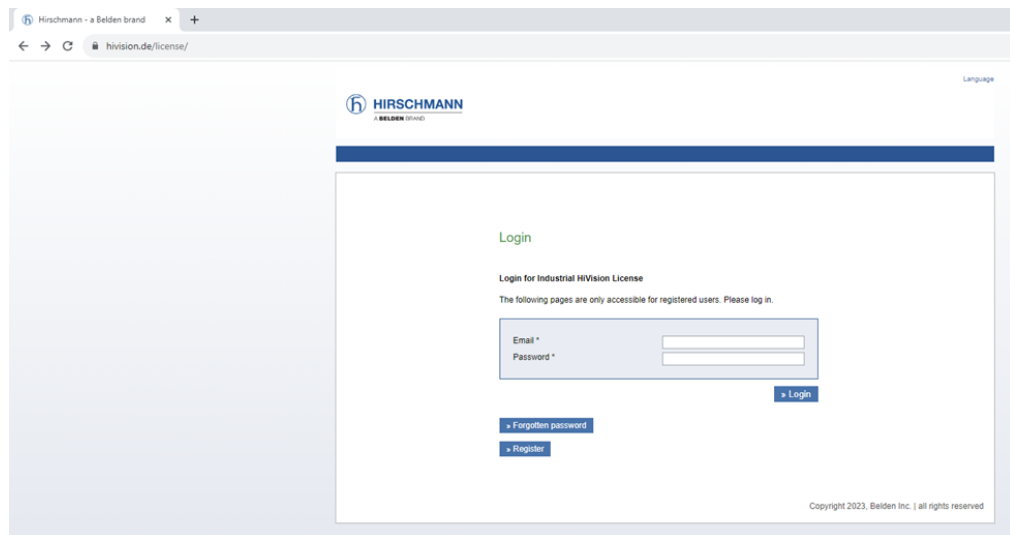


The screenshot shows a web browser window with the URL [hivision.de/license/](http://hivision.de/license/). The page features the Hirschmann logo at the top. Below the logo, there is a login form titled "Login" and "Login for Industrial HiVision License". The form includes fields for "Email \*" and "Password \*", a "Login" button, a "Forgot password" link, and a "Register" link. The footer of the page states "Copyright 2023, Belden Inc. | all rights reserved".

4. Once logged in, select "Request License key"

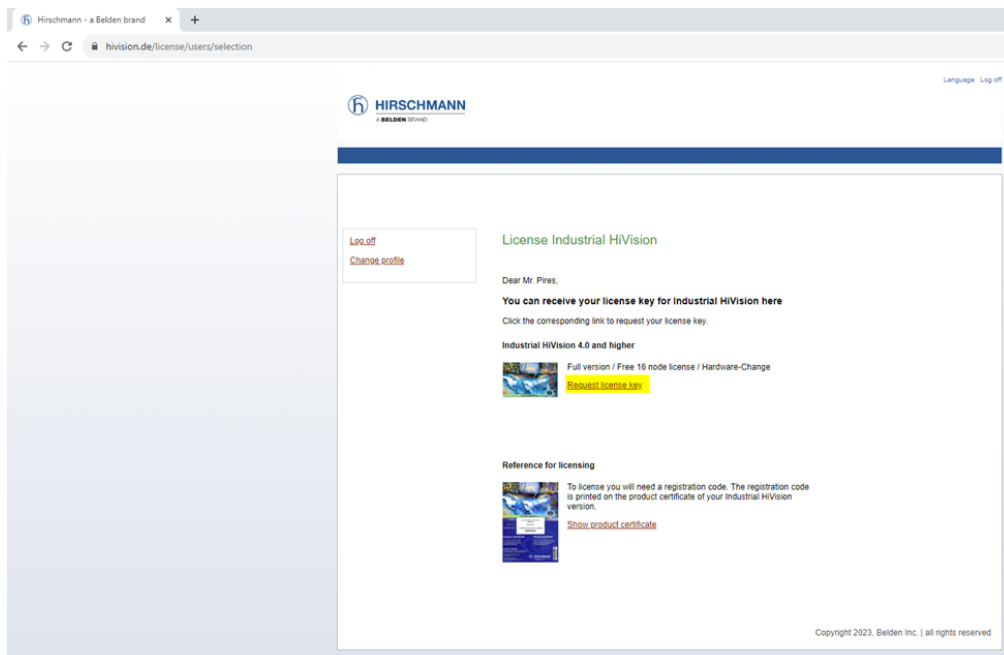

- Open your Industrial HiVision installation and navigate to "Preferences/License" menu, highlight the Hardware key shown at the bottom of the page and hit Ctrl+C

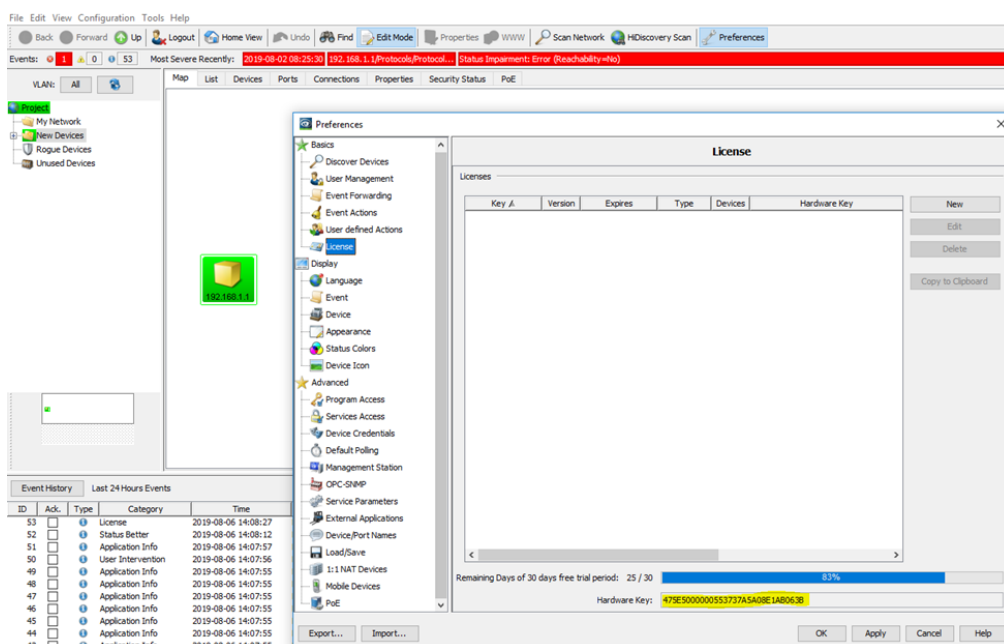

- Back to the [www.hivision.de/license/](http://www.hivision.de/license/) website, choose "Create permanent license" from the drop-down and enter info in the required fields (Ctrl+V to paste Hardware Key), enter the registration code you received with your order, then click next.

Hirschmann HiVision

license.ihivision.de/createPromotionLicense.htm

**HIRSCHMANN**  
A BELDEN BRAND

Hardware key | Personal data | Additional data | Your license

Action: Create permanent license (Full/Upgrade/AMP)   
Generates a license.

Company : \* Belden   
This text will be registered as License Holder to the license.

Hardware key: \* AC6967000002703897A181F8FDE   
The Hardware Key of the PC.

Registration codes: \* 00000410 - 943156990 - 3509 - 999900064   
Please fill in your registration code. You will find it on the product certificate.

☐ I would like to keep my software up to date.   
Please send me information about the Industrial HiVision Annual Maintenance Plan.

☐ I agree to receive email communications from Hirschmann regarding network management products, including new software versions, product details and announcements, newsletters and promotions.

» Next

7. Verify Personal Data and click next
8. Enter computer and network information and click next.
9. Highlight the full license and hit Ctrl+C then click "Finalize"

Hirschmann HiVision

license.ihivision.de/confirmation.htm

**HIRSCHMANN**  
A BELDEN BRAND

Hardware key | Personal data | Additional data | Your license

**Your licenses**

**How to publish the license(s) to Industrial HiVision**

- Mark the license code and copy it by pressing Ctrl + C
- Open the license dialog in Industrial HiVision (Settings - License - New)
- Paste the license code to field "Key" by pressing Ctrl + V

An e-mail containing your license codes was sent to the address you entered previously.


**1. Registration code: 00000410-943156990-3509-999900064**

A205516E74200855429A79AD40B34C99C41D0455EFAED45F9867A986F6C1155508D95D4D656A84B59E13F0D0F8B9E6CAF3F80435709F3DF36CD7AA4A39F8749420858CE2220A6D29D65C27C2363B88D4E7E9BC7991667A8569E12377B63D52EF4EE89366CF86539746A1657EE8D4451DA6F9E21A2268947237FC0B7E48C66392B61F1AFEDDE5A9DBEF807F3ADC9F0A62C16416C6080C8AC9109542AE40B0735F879BAFE4469FA50A34300699F528DC4F79D8B9D03041772A1D51E33925C7787E39A6DD7A4FCA8DF2F872235CDC5FD8EF8027FE3182D06F230DB1906CBFD2A66D406AAB647FC6E12813E96D31B4758516156AAF5B2AD9D7AC

» Generate more licenses » Finalize


10. Back to your installed Industrial Hivision installation, go to "Preferences/License" menu, click "New" button and Paste the License in the box (Ctrl+V) then click OK

11. Click to "Apply" the license and the registration is complete

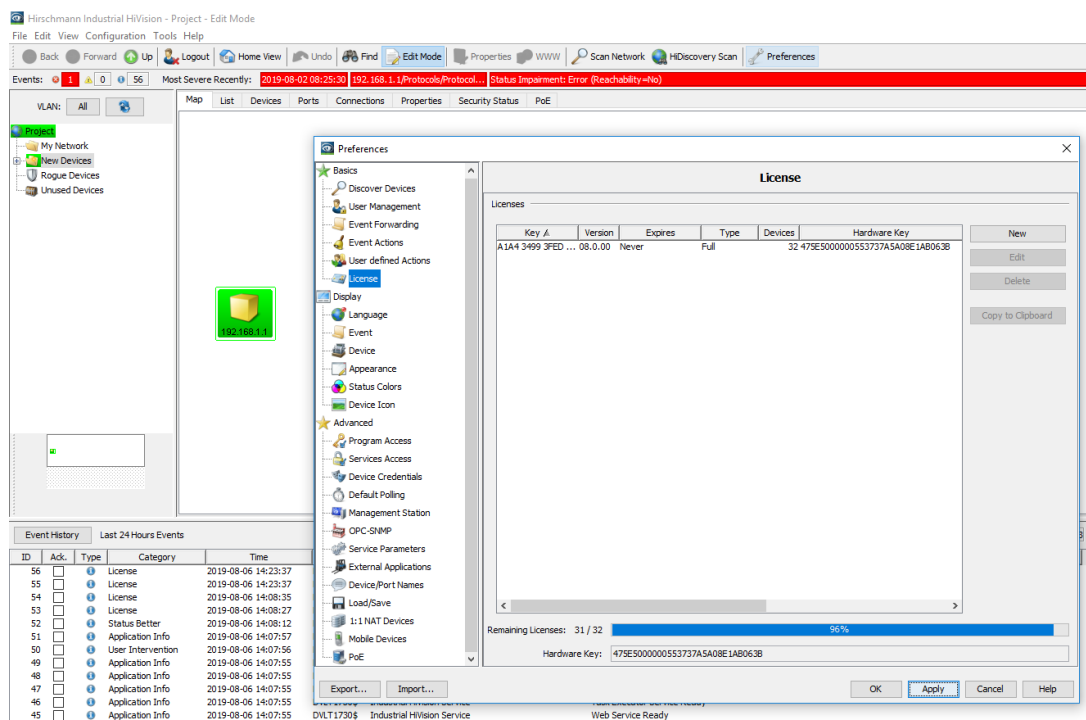


## Hardware Change


1. Go to [www.hivision.de/license/](http://www.hivision.de/license/)
2. Sign into your account to proceed.

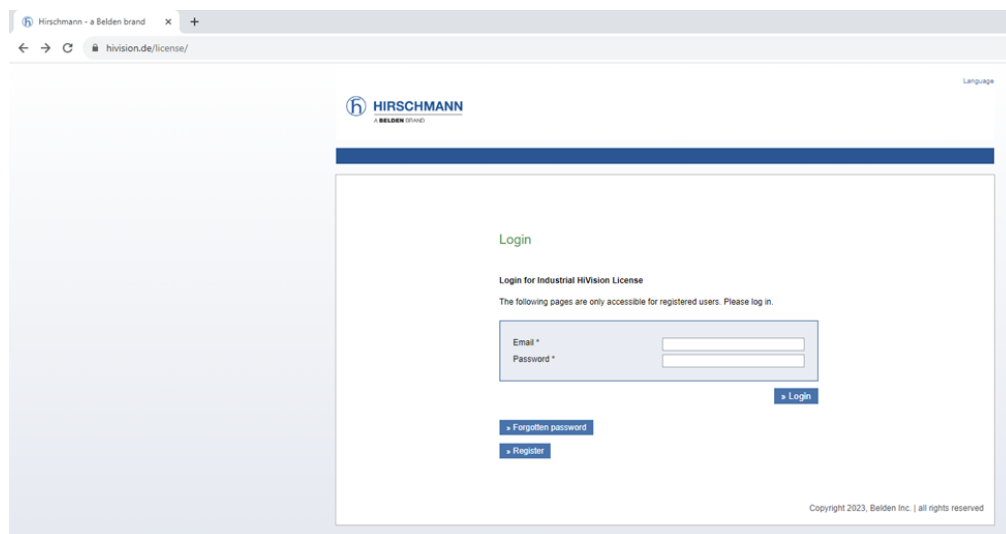

3. Once logged in select request license key

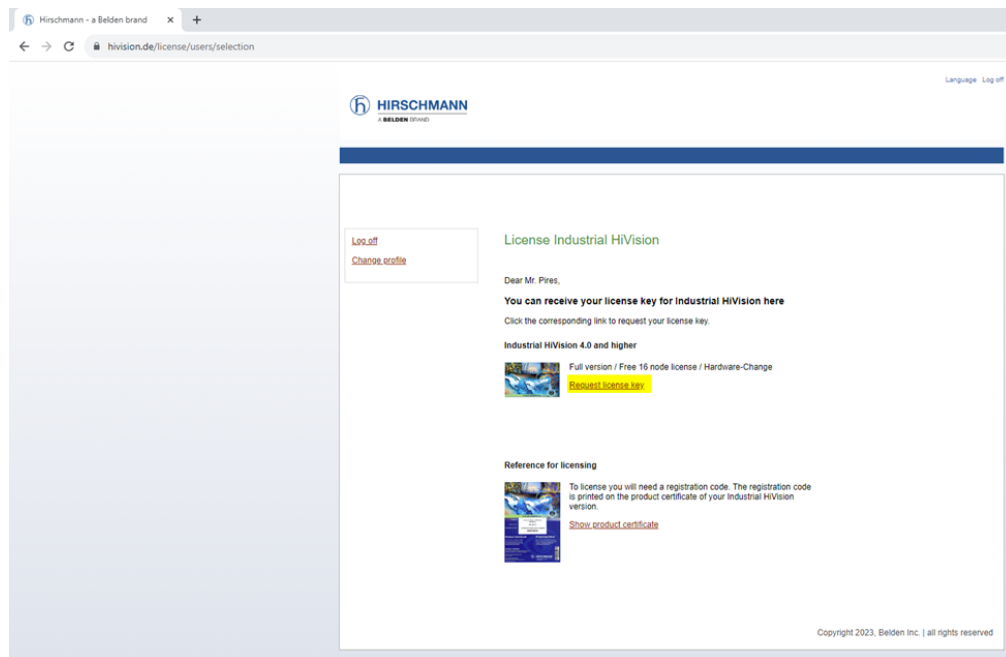

4. Select "Hardware change" from the drop-down menu and enter the hardware key from the old PC then click next.

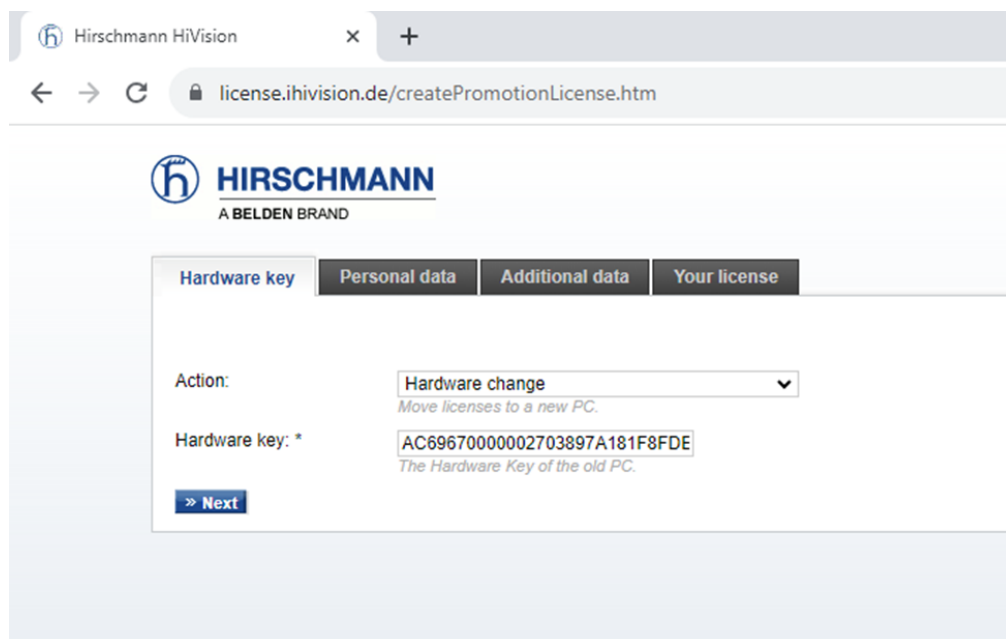

5. Enter the Hardware key from the new Industrial Hivision installation and (if available) select the desired registration codes that will need to transfer to the new HiVision PC. Then click next.

Hirschmann HiVision x +

← → ↻ license.ihivision.de/changeHardware.htm

 **HIRSCHMANN**  
A BELDEN BRAND

Hardware key Personal data Additional data Your license

Action: Hardware change  
Move licenses to a new PC.

Hardware key: \* AC69670000002703897A181F8FDE070D  
The Hardware Key of the old PC.

Registration codes: \* Choose at least one registration code.

☐ 00001251-943156990-6177-999900000

☒ 00000410-943156990-3509-999900064


☐ select all registration codes

New hardware key: \* 5528E500F0C600BA203852AA050C  
The Hardware Key of the new PC.


Reason: \*

>> Next >> Cancel

6. Verify personal info and click next
7. Enter info for new computer and click next
8. Highlight the full license and hit Ctrl+C then click "Finalize"

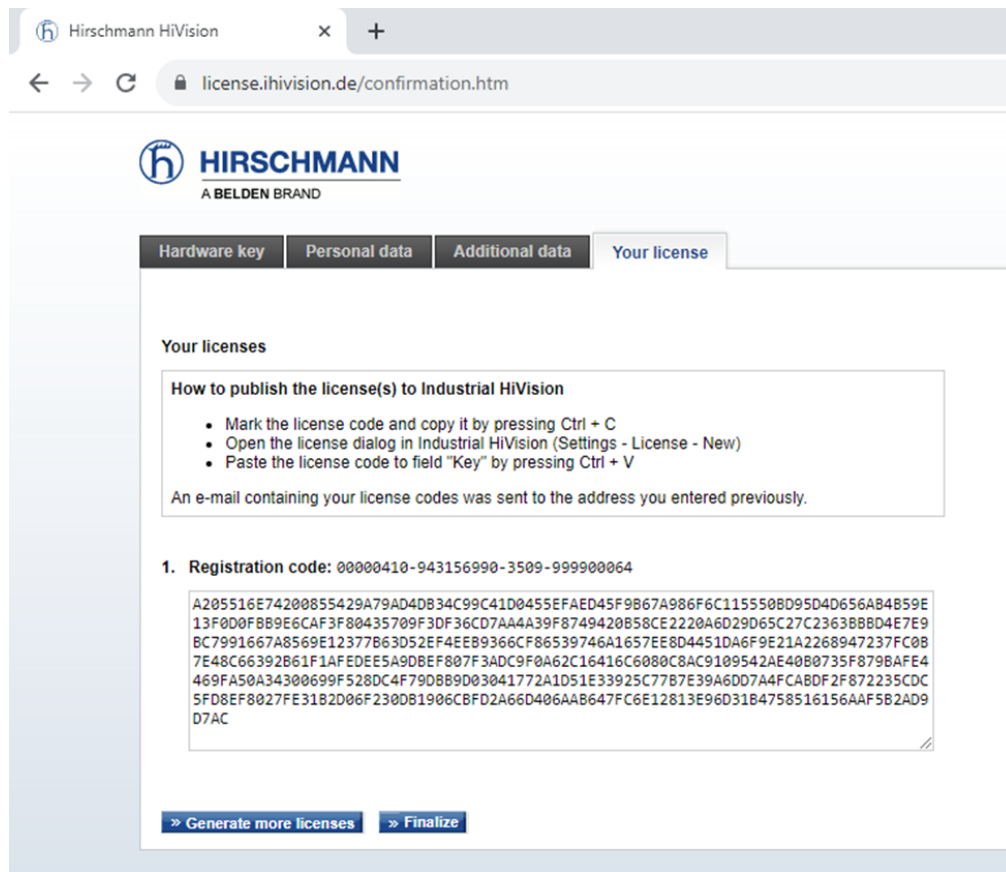

9. Back to your installed Industrial HiVision installation, go to "Preferences/License" menu, click "New" button and Paste the License in the box (Ctrl+V) then click OK.

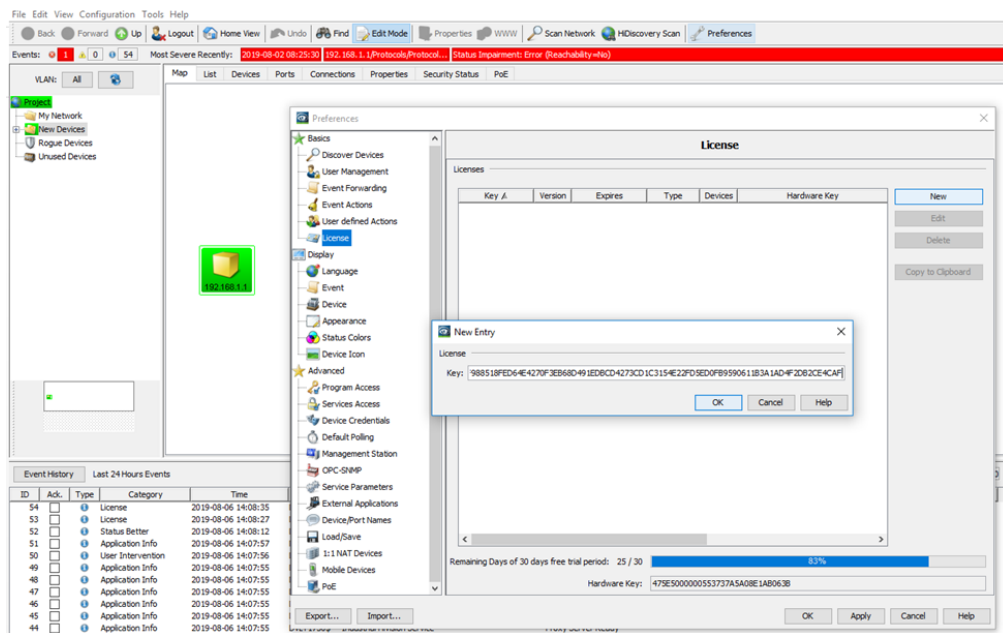

10. Click to "Apply" the license and the registration is complete

Hirschmann Industrial HiVision - Project - Edit Mode

File Edit View Configuration Tools Help

Back Forward Up Logout Home View Undo Find Edit Mode Properties WWW Scan Network HiDiscovery Scan Preferences

Events: 0 1 0 56 Most Severe Recently: 2019-08-02 08:25:30 192.168.1.1/Protocol/Protocol... Status Impairment: Error (Reachability=No)

VLANs: All Map List Devices Ports Connections Properties Security Status PoE

My Network  
New Devices  
Rogue Devices  
Unused Devices

192.168.1.1

Event History Last 24 Hours Events

| ID | Act.                     | Type              | Category | Time                |
|----|--------------------------|-------------------|----------|---------------------|
| 56 | <input type="checkbox"/> | License           |          | 2019-08-06 14:23:37 |
| 55 | <input type="checkbox"/> | License           |          | 2019-08-06 14:23:37 |
| 54 | <input type="checkbox"/> | License           |          | 2019-08-06 14:08:35 |
| 53 | <input type="checkbox"/> | License           |          | 2019-08-06 14:08:27 |
| 52 | <input type="checkbox"/> | Status Better     |          | 2019-08-06 14:08:12 |
| 51 | <input type="checkbox"/> | Application Info  |          | 2019-08-06 14:07:57 |
| 50 | <input type="checkbox"/> | User Intervention |          | 2019-08-06 14:07:56 |
| 49 | <input type="checkbox"/> | Application Info  |          | 2019-08-06 14:07:55 |
| 48 | <input type="checkbox"/> | Application Info  |          | 2019-08-06 14:07:55 |
| 47 | <input type="checkbox"/> | Application Info  |          | 2019-08-06 14:07:55 |
| 46 | <input type="checkbox"/> | Application Info  |          | 2019-08-06 14:07:55 |
| 45 | <input type="checkbox"/> | Application Info  |          | 2019-08-06 14:07:55 |

Preferences

License

| Key A              | Version | Expires | Type | Devices | Hardware Key                  |
|--------------------|---------|---------|------|---------|-------------------------------|
| A1A4 3499 3PED ... | 06.0.00 | Never   | Full | 32      | 47SE500000553737A5A08E1A8063B |

Remaining Licenses: 31 / 32 96%

Hardware Key: 47SE500000553737A5A08E1A8063B

Export... Import... OK Apply Cancel Help

DVLT17306 Industrial HiVision Service Web Service Ready